
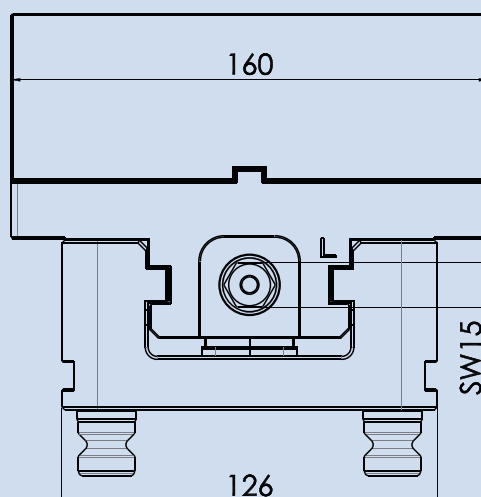


- Suitable for zero point clamping systems with 96 grid
- Adaptation of customer's own device or fixtures on the base jaws
- Positioning is done by bolts
- Soft jaws available in aluminium or steel
- Can be used for pre-machined, round or profiled parts
- Low cost soft jaws can be purchased or can be machined in-house by user
- Sturdy interface between base and top jaws with mounting screws

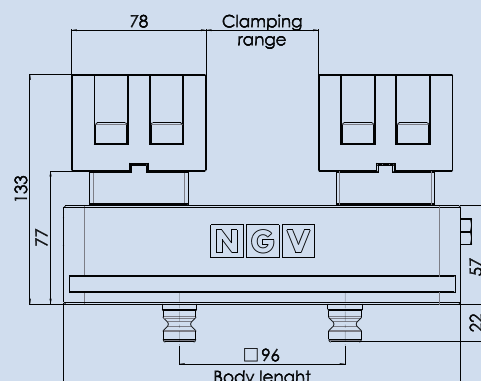

		SJV126S-XL	SJV126M-XL	SJV126L-XL
Jaw width	mm	160	160	160
Body length	mm	180	230	280
Clamping range	mm	0-55	0-105	0-155
Zero point clamping system	mm	□ 96	□ 96	□ 96
Zero point bold diameter	mm	Ø20	Ø20	Ø20
Max tightening torque	Nm	100	100	100
Clamping force	kN	20	20	20
Centring accuracy	Mm	±0,02	±0,02	±0,02