
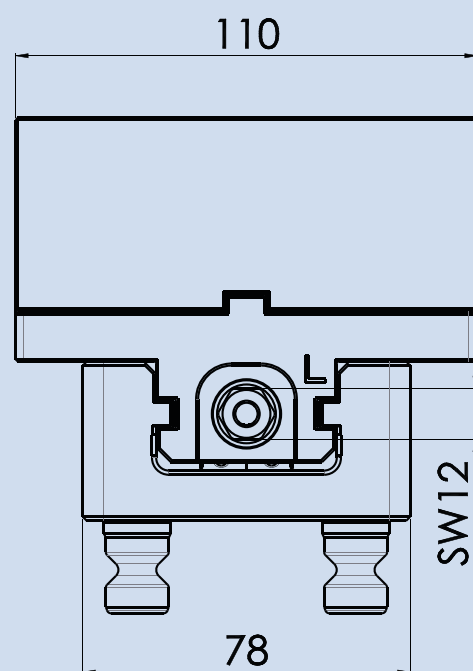


- Suitable for zero point clamping systems with 52 grid
- Adaptation of customer's own device or fixtures on the base jaws
- Positioning is done by bolts
- Soft jaws available in aluminium or steel
- Can be used for pre-machined, round or profiled parts
- Low cost soft jaws can be purchased or can be machined in-house by user
- Sturdy interface between base and top jaws with mounting screws

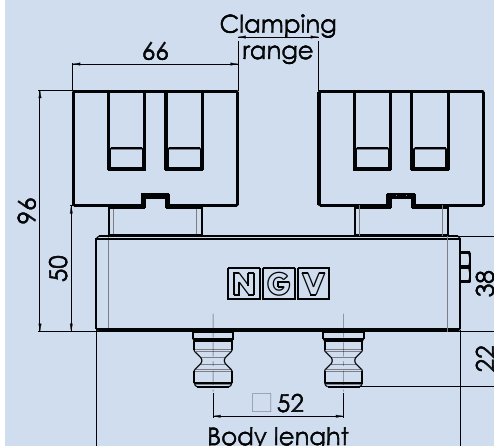

		SJV78S-XL	SJV78M-XL	SJV78L-XL
Jaw width	mm	110	110	110
Body length	mm	110	145	185
Clamping range	mm	0-15	0-45	0-85
Zero point clamping system	mm	□ 52	□ 52	□ 52
Zero point bold diameter	mm	Ø16	Ø16	Ø16
Max tightening torque	Nm	70	70	70
Clamping force	kN	14	14	14
Centring accuracy	mm	±0,02	±0,02	±0,02